

Status: 10/2023



Label printers
for industrial operation

SQUIX
Made in Germany

Scopes of delivery, designs and technical data correspond to the date of this publication. They are subject to change. Catalogue data do not represent any warranty or guarantee.



See current data on
www.cab.de/en/squix

Key features



SQUIX label printers for industrial operation

They find use in various areas of use.

They have been developed with consistent focus on intuitive usability and highly reliable processing.

Print mechanics and chassis are made of high-quality materials and match perfectly in design and function.

A wide range of peripherals and software enable user-specific solutions.

The rugged printers stand up to any demand, whether operated stand-alone, with a PC or in a network.

Print jobs are performed quickly and labels are provided straight away thanks to a high-speed processor.

- Reliable and quick printing
- Accurate print images
- Easy to operate
- Compact design
- Maximum quality standards

Sample applications

PCB



Type plates



Cardboard and pallets



Label printers guiding materials aligned to the left

Optimum printing in matters of different widths and materials

1.1, 1.2



Slim ones

for printing small labels

Label printer		SQUIX 2	
Print resolution	dpi	300	600
Print speed	mm/s max.	250	150
Print width	mm max.	56.9	54.1

1.3, 1.4



Universal ones

Best-selling industrial units, providing a wide range of accessories

Label printers		SQUIX 4.3		SQUIX 4	
Print resolution	dpi	203	300	300	600
Print speed	mm/s max.	300	300	300	150
Print width	mm max.	104	108.4	105.7	105.7

A cutter can be provided integral to a basic unit.

1.5, 1.6



Wide ones

for printing Odette, UCC and GS1 labels in logistics operations

Label printer		SQUIX 6.3	
Print resolution	dpi	203	300
Print speed	mm/s max.	250	250
Print width	mm max.	168	162.6

1.7, 1.8



Extra wide ones

for printing pallet and drum labels

Label printer		SQUIX 8.3	
Print resolution	dpi	300	
Print speed	mm/s max.	150	
Print width	mm max.	216	



Basic units provide a tear-off plate

Printed labels or continuous materials, wound on a roll or fanfold, can be torn off on a jagged plate. Cutting a material is another option, so is external rewinding.



Peel-off units provide an internal rewinder

Dispense adds to the features of a basic unit. Printed labels are peeled off their liner and can be removed by hand or by an applicator.

Label printers guiding materials aligned to the left



*SQUIX 4 P peel-off printer
providing an internal rewinder*

1 Hinged cover

Material stock can be checked and printer processes be followed through a large panoramic window.

2 Plungers

One is fixed next to the chassis inside. The other can be aligned to the outside margin of a label for optimum print images.

3 Metal chassis

It is the base to assemble components. Made of cast aluminum

4 Print roller coating

Synthetic rubber is standard, enabling highly accurate print images. Silicone is an option if aiming for extra long life cycles.

5 Label dispense

Labels are separated on a peel-off plate from their liner. A powered guide roller and a pinch roller enable highly accurate processes when printing and applying labels.

6 Peripheral port

Additional modules can be plugged easily and quickly to a unit and fixed with a screw.

7 Ribbon retainer

Replacing a ribbon is no big deal thanks to three-part clamping axles.

8 Roll retainer

The spring-mounted margin stop provides a screw cap and enables constant tension while materials are fed.

9 Internal rewinder

Labels or liners with or without a cardboard core can be wound on peel-off units. Handling a material is simplified by a three-part clamping axle.

10 Rocker

Spring mounting and guide rollers made of Teflon reduce traction and improve the accuracy of print images.

11 Material guide

It is assembled to the rocker. By turning the rotary knob, the stop can be aligned to the margin of a label.

Print image accuracy

The smaller a label, the higher are the demands. Print offset can be reduced by ± 0.2 mm using slip correction.

Direct thermal printers guiding materials aligned to the left

1.9, 1.10



Basic unit



Peel-off unit

Designed for long life cycles

SQUIX 4.3 TD - Basic unit providing a tear-off plate

Printed labels or continuous materials, wound on a roll or fanfold, can be torn off on a jagged plate. Cutting a material is another option, so is external rewinding.

SQUIX 4.3 PTD - Peel-off unit providing an internal rewinder

Dispense adds to the features of a basic unit. Printed labels are peeled off their liner and can be removed by hand or by an applicator.

Direct thermal printer		SQUIX 4.3 TD SQUIX 4.3 PTD	
Print resolution	dpi	203	300
Print speed	mm/s max.	250	250
Print width	mm max.	104	108.4

Differences to other label printers guiding materials aligned to the left

1 Plungers

Pressing force has been reduced to extend the life cycle of a print head. Other than standard, these plungers are black.

2 Print head 4.3

Highly durable for direct thermal operation

3 DRS print rollers

Silicone coating for extra long life cycles, accepting higher tolerances in print image accuracy



SQUIX 4.3/300PTD direct thermal printer, peel-off unit providing an internal rewinder

Label printers guiding materials in centered position

1.11, 1.12



Basic unit



Peel-off unit

The precise and flexible ones

All materials that are wound on rolls or reels can be printed, so can fanfold ones. Very small labels or slim continuous materials such as pressed tubes are typical applications.

A specified sensor allows round or oval hoses as high as 5 mm be labeled.

Label printer		SQUIX 4.3 M		SQUIX 4 M	
		SQUIX 4.3 MP		SQUIX 4 MP	
Print resolution	dpi	203	300	300	600
Print speed	mm/s max.	300	300	300	150
Print width	mm max.	104	108.4	105.7	105.7

Differences to label printers guiding materials aligned to the left

1 Ribbon retainer

A ruler helps ribbons be set.

2 Plungers

Both have been assembled firmly for all widths of material. There is no need of aligning the print head.

3 Roll retainer

By applying the margin stop, rolls are automatically centered.

4 Material guide

Its position next to the print roller supports print images be accurate. Widths are set with the help of a spindle.


5 Slim print rollers

If small materials and ribbons are in use, adapted print rollers are required to achieve accurate print results. They prevent rollers from wear, print heads from contamination and avoid errors while materials are fed.

Synthetic rubber coating



SQUIX 4 MP peel-off printer providing an internal rewinder

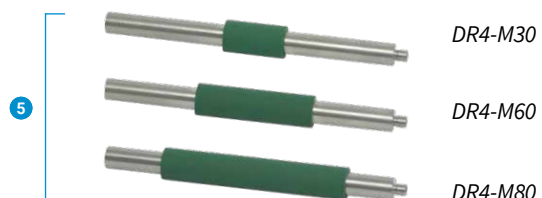

UHF RFID label printers guiding materials in centered position



Label printers providing an integral UHF RFID module

An antenna is assembled to the print head. RFID tags are written and read immediately before the labels are printed. In the event of errors, labels are indicated as invalid.

Optimized antennas add to the different RFID tags:

- 1) **Standard** for regular RFID tags
- 2) **On metal** for RFID tags applied to metal surfaces
- 3) **High sensitivity** for small RFID tags demanding high signal requirements

The RFID modules already qualify for various RFID tags. Further will be added as required. cab as well supports user-specific applications.

A wide range of peripherals and software enable with a SQUIX printer optimum solutions.

Label printer		SQUIX 4.3 M SQUIX 4.3 MP UHF RFID		SQUIX 4 M SQUIX 4 MP UHF RFID	
Print resolution	dpi	203	300	300	600
Print speed	mm/s max.	300	300	300	150
Print width	mm max.	104	108.4	105.7	105.7

Tag calibration

A special calibration feature identifies for many regular RFID tags optimum read/write positions and performances.

Characteristic calibration graphs can be printed in accordance with a label profile.

Tag contents read on-the-fly

Contents such as TID, EPC and user memory can be read **on the fly** on a RFID printer and displayed by the GUI.

Further features are

statistics,
numbers of permitted read/write errors,
void labels (i.e. labels indicated as invalid).



See further information on www.cab.de/en/squix-rfid



SQUIX 4 M UHF RFID label printer

Label printers guiding materials in centered position and providing a separator

1.14



Basic unit

For textile operations

If operations require high heating, a ribbon may stick with the textile tape after printing. A draw roller separates the ribbon reliably from a material.

Labels and continuous materials wound on rolls or reels may be as well printed.

Plungers do not have to be aligned for setting the width of a label. Adapted print rollers are provided for slim materials.

Label printers		SQUIX 4.3 MT	SQUIX 4 MT	
Print resolution	dpi	300	300	600
Print speed	mm/s max.	300	300	150
Print width	mm max.	108.4	105.7	105.7

Differences to other label printers guiding materials in centered position

1 Antistatic brush

It dissipates electrostatic charge after printing, in particular if synthetic materials are in use.

2 Separator

If operations require high heating, a ribbon may stick with the textile tape after printing. A draw roller separates the ribbon reliably from a material.




SQUIX 4 MT label printer providing a separator built in

Control panel

Self-explanatory symbols simplify settings and enable printers be operated intuitive and easily.

- 1 **LED:** Power ON
 - 2 **Status bar:** receive data, record data stream, prior warning to a ribbon ending, SD memory card / USB stick plugged, Bluetooth, WLAN, Ethernet, USB slave, time
 - 3 **Printer status:** ready, pause, number of labels printed in a print job, label peeled off, awaiting external start signal
 - 4 **USB port** for plugging a service key or a memory stick, to transfer data to the IFFS memory
 - 5 **Operation**
 - Cutter / perforation cutter: cutting
 - External rewinder: outside or inside winding
 - Tear-off mode / peel-off mode: printing a label
 - Applicator: printing and applying a label in individual steps
-
- | | | |
|--------------------|--------------------------------|----------------------------------|
| Jump to menu | Stop and delete all print jobs | Interrupt and continue print job |
| Reprint last label | Label feed | |

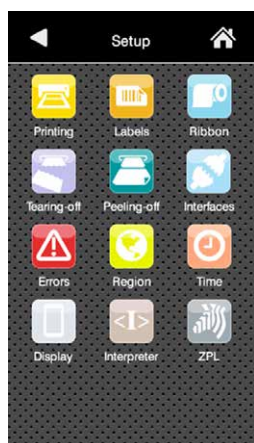

Setup



Print parameters



Print position Y



Print speed



Video tutorials

External control panel

If the control panel of a printer cannot be accessed, an additional external one can be plugged.

Same functionality as on a printer

Landscape mode or portrait mode

Operability as targeted, either on an external panel or on a printer

USB 2.0 Hi-Speed device for plugging a printer

- 1 **LED:** Power ON
- 2 **USB port** for plugging a service key or a memory stick, to transfer data to the IFFS memory
- 3 cab provides specified **USB cables** for power supply. Lengths are 1.8 m to 16 m



Print heads

2.1



A print head can be replaced by any other one, provided they are of equal width.

They are detected by the CPU and calibrated.

Major data such as operational performances, maximum operational temperatures and heating are kept in memory by the print head. The data can be read at the premise.

Print heads provided for SQUIX 2, SQUIX 4 - 300, 600 dpi

sharp-edged print images

small fonts, graphics on typeplates

printing on materials that imply high energy needs

Print heads provided for SQUIX 4.3, SQUIX 6.3 - 203, 300 dpi

Print heads provided for SQUIX 8.3 - 300 dpi

durable, printing in harsh environments, direct thermal printing

Print rollers

2.2, 2.5



Types of material:

DR print rollers

Synthetic rubber coating

highly accurate print images

standard

DRS print rollers

Silicone coating

extra long life cycles,

accepting higher tolerances in print image accuracy

Interfaces



❶ Port for plugging a **SD memory card**

❷ **2 USB hosts** for plugging a service key, an USB stick, a keyboard, barcode scanner, an USB Bluetooth adapter, USB WLAN stick, external control panel

❸ **USB 2.0 Hi-Speed device** for plugging a PC

❹ **Ethernet 10/100 Mbit/s**

❺ **RS232-C** 1,200 to 230,400 baud / 8 bit

Option

❻ **Digital I/O interface**

Printing is triggered via a PLC, a sensor or a hand switch. Status reports and errors are displayed.

Compliant to IEC/EN 61131-2, type 1+3

The inputs and outputs are galvanically isolated and protect from reverse polarity.

The outputs are also short-circuit-proof.

PNP inputs

Start printing / applying label

Print first label

Reprint

Delete print job

Label removed

Stop printing / applying label

Pause

Reset

PNP, NPN outputs

Unit ready

Print data available

Initial / upper end position

Paper feed ON

Label peeled off

Label apply / lower end position

Ribbon ending

Collective error

Technical data

● typical ○ possible ■ standard □ option

			1.1, 1.2		1.3, 1.4				1.9, 1.10		1.5, 1.6		1.7, 1.8		
Materials guided aligned to the left			Type	SQUIX 2		SQUIX 4.3		SQUIX 4		SQUIX 4.3 TD		SQUIX 6.3		SQUIX 8.3	
Print method	Thermal transfer			●	●	●	●	●	●	–	–	●	●	●	
	Direct thermal			○	–	●	●	○	–	●	●	●	●	●	
Print resolution			dpi	300	600	203	300	300	600	203	300	203	300	300	
Print speed			mm/s max.	250	150	300	300	300	150	250	250	250	250	150	
Print width			mm max.	56.9	54.1	104	108.4	105.7	105.7	104	108.4	168	162.6	216	
Initial print	Distance to locating edge		mm	2		2.8	1.2	2		2.8	1.2	0.5	3.2	2	
Material ¹⁾															
Paper, cardboard, synthetics PET, PE, PP, PI, PVC, PU, acrylate, Tyvec				●		●				–		●		●	
Direct thermal paper / cardboard				○	–	●	●	○	–	●	●	●	●	●	
Shrink tube	ready for use			–		○				–		–		–	
	continuous, pressed			○		○				–		–		–	
Textile tape				○		○				–		–		–	
Finishing	Roll, fanfold			●		●				●		●		●	
	Roll diameter		mm max.	205											
	Core diameter		mm	38.1 - 76											
	Winding			outside or inside											
Label	Width		mm	4 - 63		20 - 116						46 - 176		46 - 220	
	Height no label backfeed ²⁾		mm at least	4		4				10		6		25	
	label backfeed ²⁾		mm at least	4		6				10		12		25	
	label backfeed, peel-off		mm at least	6		6				20		12		25	
	Thickness		mm	0.03 - 0.6						0.05 - 0.1		0.03 - 0.6		0.05 - 0.6	
Liner	Width		mm	24 - 67		24 - 120				24 - 120		50 - 180		50 - 235	
	Thickness		mm	0.03 - 0.16											
Continuous	Width		mm	24 - 67		24 - 120				24 - 120		50 - 180		50 - 235	
	Thickness		mm	0.03 - 0.5											
Shrink tube	Weight (cardboard)		g/m² max.	300											
	Width ready for use		mm max.	–		120				–		–		–	
	continuous, pressed		mm	24 - 67		24 - 85				–		–		–	
	Thickness		mm max.	1.1		1.1				–		–		–	
	Ribbon ³⁾														
	Color layer			outside or inside						–		outside or inside			
	Roll diameter		mm max.	80											
	Core diameter		mm	25.4						–		25.4			
	Length		m max.	600						–		600		360	
	Width		mm	25 - 67		25 - 114				–		50 - 170		220	
Internal rewinder provided on peel-off units															
Outside diameter			mm max.	142											
Core diameter			mm	40											
Winding				outside											
Printer dimensions, weights															
Width x Height x Depth			mm	200 x 288 x 460				252 x 288 x 460				312 x 288 x 460		352 x 288 x 460	
Weight			kg	9		10				9.8		14		15	
Label sensors, position indicators															
Transmissive sensor			detecting	labels, punch marks, materials ending, print marks on translucent materials ⁴⁾											
Reflective sensor			from below or top detecting	labels, materials ending, print marks on non-translucent materials											
Sensor distance			to locating edge aligned to the left mm	5 - 26		5 - 60				5 - 60		5 - 60		5 - 60	
Material passage			mm max.	2 (5 are an option)											
Interfaces															
RS232-C 1,200 to 230,400 baud / 8 bit				■											
USB 2.0 Hi-Speed device for plugging a PC				■											
Ethernet 10/100 Mbit/s				LPD, RawIP printing, SOAP web service, OPC UA, WebDAV DHCP, HTTP/HTTPS, FTP/FTPS, TIME, NTP, Zeroconf, SNMP, SMTP, VNC											
1 USB host on the control panel			for plugging	a service key, an USB stick, USB WLAN stick, USB Bluetooth adapter											
2 USB hosts on the back of a unit			for plugging	a keyboard, barcode scanner, an USB stick, USB WLAN stick, USB WLAN stick with a rod antenna, USB Bluetooth adapter, external control panel											
USB host, 24 VDC, for peripheral plugging				■											
Digital I/O interface providing 8 inputs and 8 outputs				□											
Operating data															
Voltage				100 - 240 VAC, 50/60 Hz, PFC											
Consumption of power				<10 W in standby / 100 W in typical operation / max. 200 W											
Temperature / humidity	Operation			+5 - 40°C / 10 - 85 %, not condensing											
	Stock			0 - 60°C / 20 - 85 %, not condensing											
	Transport			–25 - 60°C / 20 - 85 %, not condensing											
Approvals				CE, FCC Class A, ICES-3, cULus, CB, CoC Mexico, CCC, BSMI, BIS, KC-Mark BIS, KC-Mark not available for SQUIX 8.3											
Control panel															
Color LCD touchscreen			Diagonal	4.3											
			Resolution Width x Height px	272 x 480											

¹⁾ Specifications are standards. Operations including small, slim, thick or stiff materials need testing, so do strongly adhesive labels.

²⁾ If labels are torn off, cut, rewound

³⁾ A ribbon should be at least as wide as the liner material.

⁴⁾ Print marks on translucent materials are not possible if operating a SQUIX 4.3 TD

Technical data

● typical ○ possible ■ standard □ option

			1.11, 1.12				1.13, 1.14				1.15			
Materials guided in centered position		Type	SQUIX 4.3 M		SQUIX 4 M		SQUIX 4.3 M UHF RFID		SQUIX 4 M UHF RFID		SQUIX 4.3 MT		SQUIX 4 MT	
Print method	Thermal transfer		●	●	●	●	●	●	●	●	●	●	●	●
	Direct thermal		●	●	○	–	●	●	○	–	●	○	–	–
Print resolution		dpi	203	300	300	600	203	300	300	600	300	300	300	600
Print speed		mm/s max.	300	300	300	150	300	300	300	150	300	300	300	150
Print width		mm max.	104	108.4	105.7	105.7	104	108.4	105.7	105.7	108.4	105.7	105.7	105.7
Initial print	Distance to locating edge	mm	centered											
Material ¹⁾														
Paper, cardboard, synthetics PET, PE, PP, PI, PVC, PU, acrylate, Tyvec			●				●				●			
Direct thermal paper / cardboard			●	●	○	–	●	●	○	–	●	○	–	–
RFID labels according to separate specification			–	–	–	–	●	●	●	●	–	–	–	–
Shrink tube		ready for use	●				–				○			
		continuous, pressed	●				–				○			
Textile tape			○				○				●			
Finishing			●				●				●			
		Roll, fanfold												
		Roll diameter	mm max.		205									
		Core diameter	mm		38.1 - 76									
		Winding	outside or inside											
Label		Width	mm		4 - 110				4 - 110				4 - 110	
		Height no label backfeed ²⁾	mm at least		3				3				4	
		label backfeed ²⁾	mm at least		4				4				6	
		label backfeed, peel-off	mm at least		6				6				–	
		Thickness	mm		0.03 - 0.6									
Liner		Width	mm		9 - 114				9 - 114				9 - 114	
		Thickness	mm		0.03 - 0.16									
Continuous		Width	mm		9 - 114				–				9 - 114	
		Thickness	mm		0.03 - 0.5				–				0.03 - 0.5	
		Weight (cardboard)	g/m² max.		300				–				300	
Shrink tube		Width	mm max.		114				–				114	
		continuous, pressed	mm		4 - 85				–				4 - 85	
		Thickness	mm max.		1.1				–				1.1	
Hose		continuous, round or oval	max. height mm		5				–				-	
Ribbon ³⁾		Color layer	outside or inside											
		Roll diameter	mm max.		80									
		Core diameter	mm		25.4									
		Length	m max.		600									
		Width	mm		25 - 114									
Internal rewinder provided on peel-off units														
Outside diameter		mm max.					142				–			
Core diameter		mm					40				–			
Winding							outside				–			
Printer dimensions, weights														
Width x Height x Depth		mm					252 x 288 x 460				252 x 288 x 460			
Weight		kg					10				10			
Label sensors, position indicators														
Transmissive sensor		detecting	labels, punch marks, materials ending, print marks on translucent materials ⁴⁾											
Reflective sensor		from below or top	detecting		labels, materials ending, print marks on non-translucent materials									
Sensor distance		to locating edge	centered position mm		0 - 55									
Material passage		mm max.	2 (5 are an option)											
Interfaces														
RS232-C 1,200 to 230,400 baud / 8 bit			■											
USB 2.0 Hi-Speed device for plugging a PC			■											
Ethernet 10/100 Mbit/s			LPD, RawIP printing, SOAP web service, OPC UA, WebDAV DHCP, HTTP/HTTPS, FTP/FTPS, TIME, NTP, Zeroconf, SNMP, SMTP, VNC											
1 USB host on the control panel		for plugging	a service key, an USB stick, USB WLAN stick, USB Bluetooth adapter											
2 USB hosts on the back of a unit		for plugging	a keyboard, barcode scanner, an USB stick, USB WLAN stick, USB WLAN stick with a rod antenna, USB Bluetooth adapter, external control panel											
USB host, 24 VDC, for peripheral plugging			■											
Digital I/O interface providing 8 inputs and 8 outputs			□											
Operating data														
Voltage			100 - 240 VAC, 50/60 Hz, PFC											
Consumption of power			<10 W in standby / 100 W in typical operation / max. 200 W											
Temperature /		Operation	+5 - 40°C / 10 - 85 %, not condensing											
humidity		Stock	0 - 60°C / 20 - 85 %, not condensing											
		Transport	–25 - 60°C / 20 - 85 %, not condensing											
Approvals			CE, FCC Class A, ICES-3, cULus, CB, CoC Mexico, CCC, BSMI, BIS, KC-Mark											
Control panel														
Color LCD touchscreen		Diagonal	"		4.3									
		Resolution Width x Height	px		272 x 480									

¹⁾ Specifications are standards. Operations including small, slim, thick or stiff materials need testing, so do strongly adhesive labels.

²⁾ if labels are torn off, cut, rewound

³⁾ A ribbon should be at least as wide as the liner material.

⁴⁾ Print marks on translucent materials are not possible if operating a SQUIX 4.3 TD

Technical data

■ standard □ option

Electronics		
Processor, 32 bit clock rate	MHz	800
RAM	MB	256
IFFS	MB	50
Port for plugging a SD memory card (SDHC, SDXC)	GB max.	512
Battery for indicating time and date, real-time clock		■
Data kept in memory (e.g. serial numbers) when power turns off		■
Setup options		
	Print Labels Ribbon Tear off Peal off Cut Apply Interfaces Error	Region: - Language - Country - Keyboard - Time zone Time Display: - Brightness - Power saving mode - Orientation Interpreter
Status bar		
	Receive data Record data stream Prior warning to a ribbon ending SD memory card plugged USB stick plugged	Bluetooth WLAN Ethernet USB slave Time
Controls		
	Ribbon winding Prior warning to a ribbon ending Ribbon ending Running out of material	Print head voltage Print head temperature Print head open Pinch roller open (peel-off unit, separator) Peripheral error
Test routines		
System diagnostics	upon startup, detection of print head included	
Information display, test printout, analysis	Status printout Fonts list List of units WLAN status	Test grid Label profile List of events Monitor mode
Status reports	- Printout of print durations, running hours, etc. - Status of a unit requested by software command - Display of errors related to a network, barcode or peripheral device, as well as links missing	
Fonts		
Integral	5 bitmap fonts: 12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B	7 vector fonts: AR Heiti Medium GB-Mono CG Triumvirate Cond. Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold
For storing	TrueType fonts	
Sets of characters	Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869 EBCDIC 500 ISO 8859-1 to -10 and -13 to -16 WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Chinese, simplified Chinese, traditional Thai Cyrillic Greek Latin Hebrew Arabian	
Bitmap	1 mm to 3 mm wide and high Zoom factors 2 to 10 0°, 90°, 180°, 270° orientations	
Vector / TrueType	0.9 mm to 128 mm wide and high Continuous zoom 360° orientation in steps of 1°	
Styles	bold, italic, underlined, outline, inverse - depending on the font type	
Character spacing	proportional or monospace	

Graphics		
Elements	lines, arrows, rectangles, circles, ellipses - filled and gradient	
Formats	PCX, IMG, BMP, TIF, MAC, GIF, PNG	
Codes		
1D barcodes (linear)	Code 39, Code 93 Code 39 Full ASCII Code 128 A, B, C EAN 8, 13 EAN/UCC 128 / GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC	Interleaved 2/5 Ident and routing code of Deutsche Post Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0
2D codes, stacked codes	DataMatrix DataMatrix Rectangle Extension QR code Micro QR code GS1 QR code GS1 DataMatrix PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F Dotcode RSS 14 truncated, limited, stacked, omni-directional All codes may vary in height, modular width and ratio. 0°, 90°, 180°, 270° orientations Feasibility of check digits, plain text printouts and start/stop coding depends on the type of code.	
Software		
Label software	cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print	■ ■ □ □
Running also with	CODESOFT Software Spectrum NiceLabel BarTender	
Stand-alone operation		■
Windows printer drivers for	Windows 10 Windows 11 Server 2016 Server 2019 Server 2022 Certification WHQL in preparation	■
Apple printer drivers	Mac OS X 10.6 or any later release	■
Linux printer drivers	CUPS 1.2 or any later release	■
Programming	JScript printer language abc Basic Compiler ZPL II (Datastream be tested in advance)	■ ■ □
Integration	SAP Database Connector	■ ■
Administration	Printer control Configuration on the Intranet and Internet	■ ■

Free and Open Source software in cab products:
www.cab.de/opensource

OPC UA

All the latest cab printers have been designed ready for interacting with machines and components of different manufacturers in industrial plants. An OPC UA server is part of the firmware.




See further information on
www.cab.de/en/opcu

cablabel S3 software

Design, print, administrate

cablabel S3 opens up the full potential of cab devices. Defining a label is first. Modular design adapts cablabel S3 to requirements step by step. Plug-ins are embedded. Native JScript programming, for example, is supported by the JScript Viewer. The designer user interface and JScript codes synchronize in real time. Optional features can be integrated, such as the Database Connector or barcode verifiers.

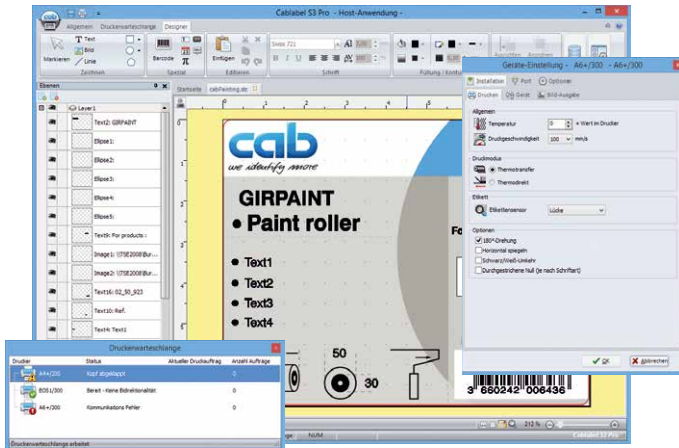

See further information on
www.cab.de/en/cablabel

Printer control

Drivers



cab provides drivers to control a printer with software other than cablabel S3.



Free download on www.cab.de/en/support



Programming



JScript

cab printers embed JScript language.

Download free manual on www.cab.de/en/programming



abc Basic Compiler

Integral to the firmware, abc in addition to JScript enables advanced programming before data are edited for printout. For example, external printer languages can be replaced without intervening in a print job in progress. Data may be imported as well from other systems such as scales, barcode scanners or PLC.

Integration



Printer Vendor Program

cab as a member of this program developed a replace method for controlling cab printers from SAP¹⁾ R/3 using SAPScript. Only variable data are sent by a host system to a printer. They add on the printer to local images and fonts (IFFS, memory card, etc.).

Stand-alone operation

This operating mode enables a printer select and print labels while not connected to a host system. Labels can be designed using software such as cablabel S3 or a text editor on a PC. Label formats, texts, graphics and data of a database can be stored on a memory card, a USB stick or a printer's IFFS memory. Only variable data are sent by a keyboard, a barcode scanner, a scale or any other host system to a printer, or be recalled by the Database Connector from a host and printed.



Printer administration



Configuration in the Intranet and Internet

Integral HTTP / FTP servers enable a printer be controlled or configured, firmware be updated and memory cards be administrated using standard applications such as a web browser or a FTP client. Administrators and operators on behalf of SNMP / SMTP are notified of states, alerts and errors by email or SNMP diagrams. Time and date are synchronized by a time server.



Database Connector

Printers in a network may access data from a ODBC / OLEDB database and print it on labels. Data can be rewritten to a database while print jobs are in progress.

¹⁾ SAP and associated logos are trademarks or registered trademarks of SAP SE.

Overview of accessories

● typical ○ possible ■ standard □ option

Pos.		Basic unit	Peel-off unit	1.1, 1.2 SQUIX 2	1.3, 1.4 SQUIX 4.3 SQUIX 4	1.9, 1.10 SQUIX 4.3 TD	1.5, 1.6 SQUIX 6.3	1.7, 1.8 SQUIX 8.3	1.11, 1.12 SQUIX 4.3 M SQUIX 4 M	1.13 SQUIX 4.3 M UHFRFID	1.14 SQUIX 4.3 MT SQUIX 4 MT Basic unit
2.6	DR4-M30, -M60, -M80 print rollers	●	●	-	-	-	-	-	□	□	□
2.7	DRS print roller	●	●	□	□	■	□	□	□	□	□
2.8	External control panel, USB cable	●	●	□	□	□	□	□	□	□	□
2.9	Label sensor 4.5	●	-	○	○	○	○	○	□	-	-
2.10	Downscale print head pressing system	●	●	○	○	■	○	○	○	○	○
2.11	Antistatic brush	●	●	□	□	□	□	□	□	□	■
2.12	Adapter 100	●	●	□	□	□	□	□	□	□	□
2.13	SD memory card	●	●	□	□	□	□	□	□	□	□
2.14	USB stick	●	●	□	□	□	□	□	□	□	□
2.15	USB WLAN stick	●	●	□	□	□	□	□	□	□	□
2.16	USB WLAN stick with a rod antenna	●	●	□	□	□	□	□	□	□	□
2.17	USB Bluetooth adapter	●	●	□	□	□	□	□	□	□	□
Peeling off											
2.18	PS800 present sensor	-	●	□	□	□	□	□	-	-	-
2.19	PS900 present sensor	-	●	□	□	□	□	□	□	□	-
2.20	PS1000 MP present sensor	-	●	-	-	-	-	-	□	□	-
2.21	Extended DP210, DP410, DP610 peel-off plates	-	●	□	□	□	□	-	□	□	-
2.22	Reflective product sensor	-	●	□	□	□	□	□	□	□	-
Interfaces, switches											
3.1	Digital I/O interface	●	●	□	□	□	□	□	□	□	□
3.2	I/O interface plug, SUB-D, 25 pins	●	●	□	□	□	□	□	□	□	□
3.3	Label selection - I/O box	●	●	□	□	□	□	□	□	□	□
3.4	TR2 hand switch	●	●	□	□	□	□	□	□	□	□
3.5	Foot switch	●	●	□	□	□	□	□	□	□	□
Connecting cable											
4.1	RS232-C cable	●	●	□	□	□	□	□	□	□	□
Cutting, perforating											
5.1	CSQ 401 / CSQ 402 cutters	●	○	-	■ or □	■ or □	-	-	■ or □	■ or □	-
5.2	PSQ 403 perforation cutter	●	○	-	-	-	-	-	□	□	-
5.3	CU200, CU400, CU600, CU800 cutters	●	○	□	□	□	□	□	□	□	□
5.4	PCU400/2,5, PCU400/10 perforation cutters	●	○	-	□	□	-	-	□	□	□
Stacking, verifying											
5.5	ST400 M stacker providing a cutter and a base frame	●	○	-	-	-	-	-	□	□	□
5.6	CC200-SQ scanner	●	●	□	□	□	□	□	□	□	-
Rewinding, unwinding											
6.1	RG200, RG400 guide plates	-	●	□	□	□	-	-	□	□	-
6.2	External ER1/210, ER2/210 ¹⁾ , ER3/210 rewinders	●	○	-	□	□	□	□	○	○	-
6.3	External ER4/300, ER6/300 rewinders	●	○	-	□	□	□	-	○	○	-
6.4	External EU4/300, EU6/300 unwinders	●	○	-	□	□	□	-	□	□	□
6.5	Kit to adapt a rewinder or an unwinder	●	○	-	□	□	□	□	□	□	□
Tube labeling											
7.1	AXON 2 tube applicator	-	●	-	-	-	-	-	□	-	-
Wrap-around labeling											
7.2	WICON wrap-around applicator	-	●	-	-	-	-	-	□	-	-
Applicators, demand modules											
7.3	S1000-220, -300, -400 applicators	-	●	□	□	□	□	-	□	□	-
7.8	S3200 applicator	-	●	□	□	□	-	-	□	□	-
7.11	S5104, S5104M, S5106 demand modules	-	●	-	□	□	□	-	□	-	-
7.12	All-around labeler	-	●	□	□	□	-	-	□	□	-
Assembly assistants											
8.1	Assembly plate	-	●	□	□	□	-	-	□	□	-
8.2	Profiles 40 mm, 80 mm, 120 mm	-	●	□	□	□	-	-	□	□	-
8.3	Base plate 500 mm x 255 mm	-	●	□	□	□	-	-	□	□	-
8.4	Floor stand	-	●	□	□	□	□	□	□	□	-
8.5	Jig for retaining a printer unit	-	●	□	□	□	□	□	□	□	-
Special covers, protective chassis											
9.1	ESD surface	●	●	□	□	□	□	-	□	□	□
9.2	Food applications	●	●	-	□	□	□	-	□	□	□
9.3	Stainless steel chassis for food applications	●	●	-	□	□	□	-	□	□	-
9.4	Chassis protecting from dust	●	●	-	□	□	□	-	□	□	-
	Chassis for cleanroom operation	●	●	-	□	□	□	-	□	□	-

¹⁾ designed for the A+ printer series, adapted to SQUIX; supplied until external rewinders ER20x will be available

Accessories

2.6		<p>DR4-M30 print roller Liner and continuous materials as wide as 30 mm</p> <p>DR4-M60 print roller Liner and continuous materials as wide as 60 mm</p> <p>DR4-M80 print roller Liner and continuous materials as wide as 80 mm</p> <p>Synthetic rubber coating enables highly accurate print images.</p>	2.18		<p>PS800 present sensor for use with materials guided aligned to the left</p> <p>Labels are detected in peel-off position. As soon as a label has been removed, the next one is automatically printed.</p> <p>The minimum width of a label in use is 16 mm, its minimum height 6 mm.</p> <p>Distant 7 mm to the locating edge</p>
2.7		<p>DRS4 print roller Materials as wide as 120 mm</p> <p>Silicone coating enables extra long life cycles, accepting higher tolerances in print image accuracy.</p>	2.19		<p>PS900 present sensor for use with materials guided aligned to the left or in centered position</p> <p>The moveable sensor qualifies for small or customized labels. As soon as a label has been removed, the next one is automatically printed.</p> <p>The minimum width of a label in use is 4 mm, its minimum height 6 mm.</p> <p>If materials are in use aligned to the left, they must be 12 cm to 60 mm distant to the locating edge. Materials in centered position: ibid</p>
2.8		<p>External control panel If the control panel of a printer cannot be accessed, an additional external one can be plugged.</p> <p>Same functionality as on a printer</p> <p>Landscape mode or portrait mode</p> <p>Operability as targeted, either on an external panel or on a printer</p> <p>USB 2.0 Hi-Speed device for plugging a printer cab provides specified USB cables for power supply. Lengths are 1.8 m to 16 m.</p>	2.20		<p>PS1000 MP present sensor for use with materials guided in centered position</p> <p>Labels are detected in peel-off position. As soon as a label has been removed, the next one is automatically printed.</p> <p>The minimum width of a label in use is 4 mm, its minimum height 6 mm. Centered position</p>
2.9		<p>Label sensor 4.5 Only for operation on a SQUIX 4/4.3 M printer guiding materials in centered position. Maximum material passage 5 mm</p>	2.21		<p>Extended DP210, DP410, DP610 peel-off plates for use with labels that hardly separate due to strong adhesive or thick liner material. Use only if printing has been triggered by the touch of a button on the display or by a control signal. A present sensor cannot be used.</p>
2.10		<p>Downscale print head pressing system Direct thermal printing requires less pressure exerted to a print head, resulting in a longer life cycle of the latter.</p>	2.22		<p>Reflective product sensor Detecting products automatically on a conveyor</p>
2.11		<p>Antistatic brush It dissipates electrostatic charge after printing, in particular if synthetic materials are in use.</p>	3.1		<p>Digital I/O interface Labeling is triggered via a PLC, a sensor or a hand switch. Status reports and errors are displayed.</p>
2.12		<p>Adapter 100 if operating label rolls with a core diameter of 100 mm and outside diameter succeeds 180 mm</p>	3.2		<p>I/O interface plug, SUB-D, 25 pins All control signals connect to the I/O interface using clamping screws.</p>
2.13		<p>SD memory card</p>	3.3		<p>Label selection - I/O box A maximum of 16 labels per box can be selected from a memory card by a superior control unit, such as a PLC. Two boxes may be plugged. Making use of an I/O box, four inputs and four outputs suffice for implementing PLC processes via abc programming.</p>
2.14		<p>USB stick</p>	3.4		<p>TR2 hand switch For plugging to a digital I/O interface</p>
2.15		<p>USB WLAN stick 2.4 GHz 802.11b/g/n Hotspot mode or infrastructure mode</p>	3.5		<p>Foot switch For plugging to a digital I/O interface</p>
2.16		<p>USB WLAN stick with a rod antenna to extend the range of operation 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac Hotspot mode or infrastructure mode</p>	4.1		<p>RS232-C cable 9/9 pins, 3 m</p>
2.17		<p>USB Bluetooth adapter</p>			

Cutting, perforating

5.1



CSQ cutter

5.2



PSQ perforation cutter

CSQ 401 / CSQ 402 cutters are provided assembled to a printer ex factory or accessorial on delivery for all SQUIX 4 units.

Paper labels and self-adhesive labels, cardboard and synthetic materials can be cut, so can shrink tubes. By pivoting the cutter, materials can be accessed for removal.

The CSQ 402 provides a more powerful engine and titanium-coating, enabling highly performant cutting even with thick materials such as cardboard and shrink tubes, as well as with self-adhesive materials. The number of cuts performed are kept in memory, allowing wear control.

PSQ 403 perforation cutters are provided for all SQUIX 4M units. Continuous materials such as shrink tubes can be perforated, to simplify separation by hand at a later stage.

The design and technical data correspond to the CSQ 402.

Cutter		CSQ 401	CSQ 402	
Perforation cutter				PSQ 403
Operated with		SQUIX 4.3, SQUIX 4 SQUIX 4.3 M, SQUIX 4 M		SQUIX 4.3 M, SQUIX 4 M
Perforation Distance between off-cuts	mm	-	-	2.5
Width of off-cuts	mm	-	-	0.4
Quantity of off-cuts		-	-	6
Material Width	mm max.	120	120	114
Weight (cardboard)	gr/m² max.	200	300	300
Thickness	mm	0.7	1.1	1.5
Cutting length	mm at least	10		
Material passage	mm max.	2.0	2.0	2.0
Performance*	cuts/min	120	200	200
Controls		no final cutter position, cover off cutter		
Tray				
Label height	mm max.	100		

* at use of material 1 mm high, no backfeed

5.3



CU cutter

5.4



PCU perforation cutter

CU cutters

Paper labels and self-adhesive labels, cardboard, textile and synthetic materials can be cut, so can shrink tubes.

Tray for collecting a maximum of approximately 50 labels

PCU400 perforation cutter

Continuous materials such as textiles or shrink tubes can be perforated, to simplify separation by hand at a later stage.

Cutting a material is as well possible.

Cutter			CU200		CU400		PCU400		CU600		CU800	
Perforation cutter							2.5 10					
Operated with			SQUIX 2		SQUIX 4.3, SQUIX 4 SQUIX 4.3 M, SQUIX 4 M SQUIX 4.3 MT, SQUIX 4 MT				SQUIX 6.3		SQUIX 8.3	
Perforation	Distance between off-cuts	mm	-	-	-	2.5	10	-	-	-	-	-
	Width of off-cuts	mm	-	-	-	0.5		-	-	-	-	-
Material	Width	mm max.	67	120	114	85		180		232		
	Weight (cardboard)	gr/m²	60 - 300									
	Thickness	mm	0.05 - 1.1					0.05 - 0.5				
Cutting length		mm at least	5									
Material passage		mm max.	2.5									
Performance*		cuts/min	100									
Printing stops if			no final cutter position									
Tray												
Label height		mm max.	-	100		-	-	-	-	-	-	-

* at use of material 1 mm high, no backfeed

The CU400 will be replaced by the CSQ cutter series, the PCU400 by the PSQ403 perforation cutter.

Stacking

5.5



ST400 M stacker providing a cutter

- 1 Printed materials can be cut and then collected.
Print jobs stop if the maximum number of labels have been collected.
Limitations may occur with stiff or curved materials.
cab recommends to have such operations tested.
- 2 A unit can be set anywhere on a table with the help of a base frame.

Stacker providing a cutter		ST400 M
Operated with		SQUIX 4.3 M, SQUIX 4 M SQUIX 4.3 MT, SQUIX 4 MT
Material	Width	mm
	Weight (cardboard)	gr/m ²
	Thickness	mm
Cutting length		mm
Material passage		mm max.
Performance*		cuts/min
Printing stops if		no final cutter position, paper jam, cover open, limit of collecting
Limit of collecting		mm max.
		100

* at use of material 1 mm high, no backfeed



Support table - label W x H

The table and the protective cover are adapted to the size of a label. Please request individually.

Verifying

5.6



CC200-SQ scanner for detecting linear 1D barcodes, 2D and stacked codes

A camera checks a code printed on a label in horizontal or vertical direction in terms of legibility or content. In the case of a bad coding, printing stops and the label can be removed by hand. Retracting such labels after stopping and blackening them is another printer option.

The scanner can be operated in tear-off mode and in peel-off mode.

Scanner		CC200-SQ
Operated with		all SQUIX units
Scan distance		mm
Scan angle		°
Number of codes on a label		
Controls		
		GOODBAD
		VERIFY
		check of legibility
		check of legibility and results compared with initial data


See www.cab.de/en/cc200 for more information.

Rewinding, unwinding with or without the use of a cardboard core

6.1



RG guide plates enable labels be rewound internally on peel-off units. A guide plate therefore replaces the peel-off plate.

Guide plate		RG200	RG400	
	Operated with	SQUIX 2 P	SQUIX 4.3 P SQUIX 4 P	SQUIX 4.3 MP SQUIX 4 MP
	Material width mm max.	67	120	114
	Roll diameter mm max.	142		
	Clamping axle provided for core diameters of mm	38.1 - 40		
	Winding	outside		

6.2



External ER1, ER2, ER3 rewinders for printer assembly using screws. Label webs wound outside or inside are wound consistently and tight by electronic control, with the help of a pendulum arm.

External rewriter	ER1/210	ER2/210	ER3/210
Operated with	SQUIX 4.3, SQUIX 4 SQUIX 4.3 M, SQUIX 4 M	SQUIX 6.3	SQUIX 8.3
Material width mm max.	120	180	235
Roll diameter mm max.	205		
Core diameter mm	40 if a winder axle or a cardboard core are in use 76 if a cardboard core is in use with an adapter		
Winding	outside or inside		

6.3



External ER4, ER6 rewinders, power supply built in

Label webs wound outside or inside are wound consistently and tight by electronic control, with the help of a pendulum arm. They operate also with printers other than cab.

External rewriter	ER4/300	ER6/300
Operated with	SQUIX 4.3, SQUIX 4 SQUIX 4.3 M, SQUIX 4 M	SQUIX 6.3
Material width mm max.	120	180
Roll diameter mm max.	300	
Core diameter mm	40 if a winder axle or a cardboard core are in use 76 if a cardboard core is in use with an adapter	
Winding	outside or inside	
Adapter kit	<input type="checkbox"/>	<input type="checkbox"/>

6.4



External EU unwinders

Even heavy rolls are fed consistently. Label webs wound outside or inside can be operated.

External unwinder	EU4/300		EU6/300
Operated with	SQUIX 4.3 SQUIX 4	SQUIX 4.3 M SQUIX 4 M SQUIX 4.3 MT SQUIX 4 MT	SQUIX 6.3
Material width mm max.	120	114	180
Roll diameter mm max.	300		
Core diameter mm	38.1		
mm if an adapter is in use	76		
Winding	outside or inside		
Adapter kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Tube labeling



AXON 2 tube applicator

Tubes and vials of diameters 10 mm to 22 mm can be labeled (7 mm to 16 mm if options are provided). See AXON catalogue

The tubes and vials can be inserted and removed by hand or automated by a handling system. They may be ejected also to a tray.

Tube applicator			AXON 2
Operated with			SQUIX 4.3 MP, SQUIX 4 MP
Tube	Diameter	mm	10 - 22
	Length, closure cap included	mm	25 - 120
	Conicity	% max.	0.8
Label	Materials		paper, synthetics such as PET, PP
	Width	mm	5 - 56
	Height	mm at least	12
Liner	Width	mm max.	60
Controls			applicator pivoted, tube missing, incorrect tube diameter



For more information on AXON 2 see www.cab.de/en/axon2



For more information on AXON 1 see www.cab.de/en/axon1

Cable labeling



WICON wrap-around applicator



Cylindric items of diameters of 2 mm to 16 mm, such as single wires, strands, cables, hoses, tubes or round rods, can be labeled with the wrap-around applicator.

Transparent laminate covers data blocks and protects them persistently from dust and wear.

Items are inserted in horizontal orientation and centered by panels. Printing a label and wrapping it around an item takes 1.8 to six seconds, depending on the number of wrap-arounds.

Operation starts as soon as an item has been inserted. It may be triggered also via a data interface or an I/O interface. A label is printed and then picked up by the applicator. The diameter of an item is identified on the wrapper head. The size of a label determines how many times it will be wrapped around the item.

Wrap-around applicator			WICON
Operated with			SQUIX 4.3 MP, SQUIX 4 MP
Item	Diameter	mm	2.0 - 16.0
	Length	mm at least	132
	Centering panel distant to left and right	mm	124
	Label margin distant to centering panel	mm	12.7
	Label margin distant to edge of item by stop	mm	25 - 100
	Deflection related to a length of 124 mm	mm max.	1
Label	Width	mm	12.7 - 50.8
	Height	mm	19.1 - 70.0
Applicator	Cycle time printing and applying or applying and printing	s	1.8 - 6
	Number of wrap-arounds		2 - 10
	Speed of wrapping	u/sec	3.0
	Initial percentage of speed of wrapping	%	10 to 100
	Wrapper position	mm	-2



See for more information on WICON and labels. www.cab.de/en/wicon

S1000 applicator



Apply labels in real time

S1000 attached to a SQUIX peel-off printer is economic, whether operated semi-automated or integrated in vertical orientation to a manufacture plant. Labels are applied to an item by a stroke cylinder.

- 1 Long life cycles**
The ball bearing guide bars are low wear.
- 2 Different levels of application**
By providing different lengths of stroke for the cylinder, labels can be applied on various heights to an item.
- 3 Compressed air regulation**
Micro filters prevent from contamination. Decompression keeps the quality of label applications consistently high.
- 4 Reliable processes**
Supporting air, intake air and stroke speeds can all be set. The pressing force can be reduced to less than 10N (1kg) in sensitive operations. Purging the intake ducts subsequent to every label application prevents from contamination.
- 5 A wide range of sizes**
Labels 25 mm to 176 mm wide and 25 mm to 200 mm high can be applied.
- 6 Supporting air**
It enables labels be blown onto a pad.
- 7 Pad**
Labels are transferred to a pad and held there by vacuum. A stroke cylinder moves the pad with the labels to an item.

Pre-dispense

Label applications can be verified by the touch of a button. Printing is triggered on a first touch and the printed label is transferred to the applicator. The label is applied on a second touch.

Applicator	S1000-220	S1000-300	S1000-400
Operated with	SQUIX 2, SQUIX 4.3, SQUIX 4 SQUIX 4.3 M, SQUIX 4 M, SQUIX 6.3		
Cylinder stroke mm	220	300	400
Weight packaging excluded kg	4.5	5	5
Consumption of power W max.	15		
Stroke of a pad as calculated below a unit mm	64	144	244
Compressed air bar	4.5		
Performance labels/min approx ¹⁾	25		

¹⁾ calculated at a stroke of 100 mm below a unit, using labels 100 mm high and a print speed of 100 mm/s

Accessories




Universal pads

Drilled intake holes arranged in a grid are covered by foil. Piercing according to the size of a label

Universal pad	A1021		A1021
Operated with	SQUIX 2	SQUIX 4.3 SQUIX 4	SQUIX 4.3 SQUIX 4
Label width mm	25 - 63	25 - 70	25 - 90
Label height mm	25 - 60		25 - 90
Surface of an item	flat		
Height of an item	flexible		
State of an item at the moment a label is applied	at rest		


S1000 applicator accessories

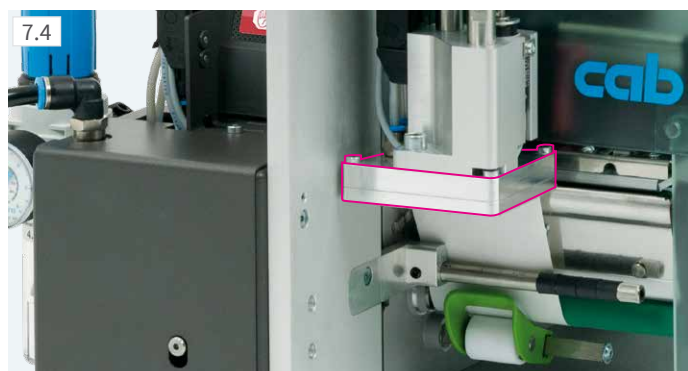

Tamp-on pads

They are manufactured according to the size of a label.

Tamp-on pad		A1021		
Operated with		SQUIX 2	SQUIX 4.3 SQUIX 4	SQUIX 6.3
Label width	mm	25 - 63	25 - 116	50 - 176
Label height	mm	25 - 200		
Surface of an item		flat		
Height of an item		flexible		
State of an item at the moment a label is applied		at rest		

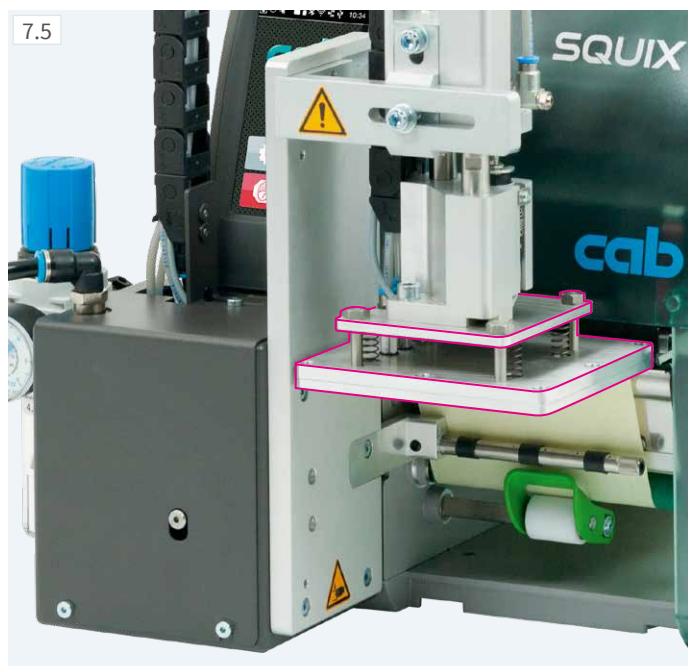

Universal pads, spring-mounted

Pitch of spring enables labels be applied even to inclined surfaces. Drilled intake holes arranged in a grid are covered by foil. Piercing according to the size of a label

Universal pad		A1321	
Operated with		SQUIX 4.3, 4	SQUIX 4.3, 4
Label width	mm	25 - 116	25 - 116
Label height	mm	25 - 102	25 - 152
Surface of an item		flat	
Height of an item		flexible	
State of an item at the moment a label is applied		at rest	

Tamp-on pads, spring-mounted

Pitch of spring enables labels be applied even to inclined surfaces. They are manufactured according to the size of a label.


Tamp pad		A1321	
Operated with		SQUIX 4.3, 4	SQUIX 6.3
Label width	mm	25 - 116	50 - 176
Label height	mm	25 - 200	
Surface of an item		flat	
Height of an item		flexible	
State of an item at the moment a label is applied		at rest	



Blow-on pads

They suit for items sensitive to pressure. The pad locates approx. 10 mm ahead of an item.

Blow-on pad		A2021		
Operated with		SQUIX 2	SQUIX 4.3, 4	SQUIX 6.3
Label width	mm	25 - 63	25 - 116	upon request
Label height	mm	25 - 100		
Surface of an item		flat		
Height of an item		fixed		
State of an item at the moment a label is applied		at rest or in motion		

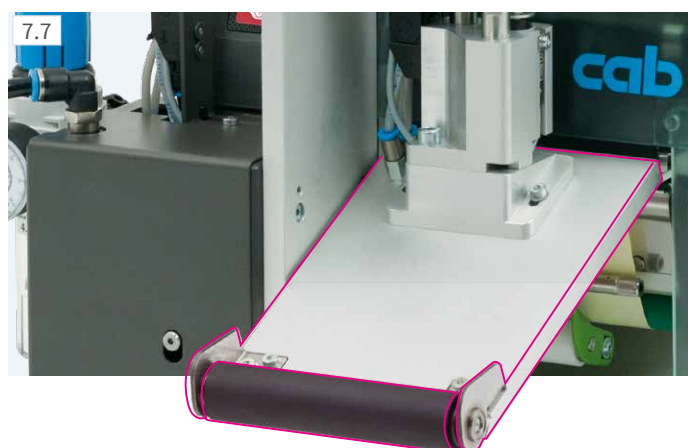


Roll-on pads

Labels are fed to below a roller subsequent to printing. The pad moves onto an item. Labels are carried along by the item and rolled on.

Roll-on pad		A1411	
Operated with		SQUIX 4.3, 4	SQUIX 6.3
Label width	mm	25 - 116	50 - 176
Label height	mm	80 - 200	
Surface of an item		flat	
Height of an item		flexible	
State of an item at the moment a label is applied		in motion	

S3200 applicator

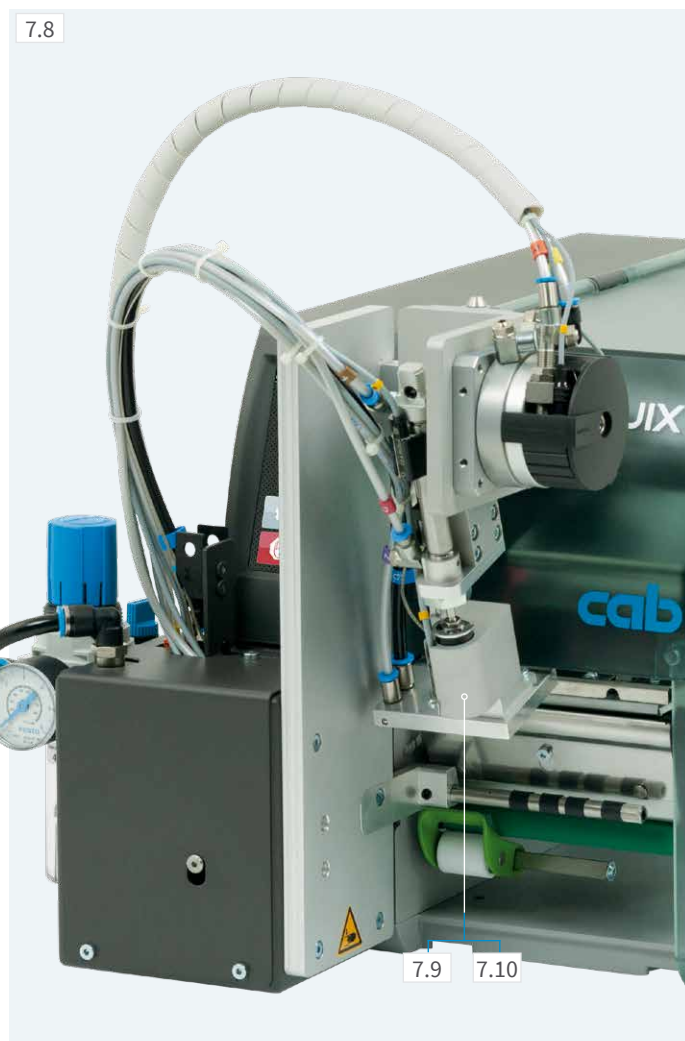

Apply labels in real time

S3200 attached to a SQUIX peel-off printer is economic, whether operated semi-automated or integrated to a manufacture plant. Printed labels are set 45° to 95° to the horizontal by a rotary cylinder and applied automatically to an item by a short stroke cylinder.

Life cycles, pre-dispense, compressed air regulation, reliable processes and supporting air correspond to S1000 (see page 22).

Applicator	S3200
Operated with	SQUIX 2, SQUIX 4.3, SQUIX 4, SQUIX 4.3 M, SQUIX 4 M
Rotary cylinder	45° - 95°
Stroke cylinder	30
Depth F of a pad immersing	5
Weight packaging excluded kg	4.5
Consumption of power W max.	15
Compressed air bar	4.5
Performance labels/min approx. ¹⁾	20

¹⁾ calculated using labels 40 mm high and a print speed of 100 mm/s

Tamp-on pads, blow-on pads

They are manufactured according to the size of a label.

Tamp-on pad	A3200-1100	
Operated with	SQUIX 2	SQUIX 4.3, 4
Label width mm	4 - 63	10 - 116
Label height mm	6 - 80	
Surface of an item	flat	
State of an item at the moment a label is applied	at rest	
Blow-on pad	A3200-2100	
Operated with	SQUIX 2	SQUIX 4.3, 4
Label width mm	10 - 63	10 - 116
Label height mm	10 - 80	
Surface of an item	flat	
State of an item at the moment a label is applied	at rest or in motion	

Demand modules



S5104, S5104 M, S5106 demand modules

Items can be labeled in motion on a conveyor. A product sensor detects the target position of a label. While a label is peeled off, the next one is printed. The speed of transport has to match with the speed of printing. A reflective sensor monitors positioning.

A label sensor can be included or not.

Demand module	S5104	S5104 M	S5106
Operated with	SQUIX 4.3 SQUIX 4	SQUIX 4.3 M SQUIX 4 M	SQUIX 6.3
Label width mm	25 - 116	4 - 110	50 - 176
Label height mm	25 - 210	10 - 210	25 - 210
Distance of initial print line to the peel-off plate	336 - 518		
Surface of an item	flat		
Height of an item	fixed		
State of an item at the moment a label is applied	in motion (speed adapted to printing)		
Weight packaging excluded kg	2.5	2.5	3.5
Consumption of power W max.	not specified		
Performance labels/min approx. ¹⁾	60		

¹⁾ calculated using labels 100 mm high and a print speed of 100 mm/s

All-around labeler



All-around labeler

Cylindric items can be labeled on a 360° circumference. They are placed onto rollers. Label applications are triggered by a hand switch or a foot switch.

A mount and a cable for plugging a SQUIX printer are included on delivery, so is a foot switch.

Tamp-on pad	A1021	M1021
Operated with	SQUIX 2	SQUIX 4.3, SQUIX 4
Label width mm	25 - 63	25 - 116
Label height mm	25 - 140	
Diameter of an item mm	12 - 40	
Surface of an item	cylindric	
State of an item at the moment a label is applied	in rotary motion	

Assistants for assembling SQUIX label printers



Mount

A label printer system and a jig for retaining an item can be assembled.

- 1 **Assembly plate**
to assemble a label printer system
- 2 **Profile, aluminum square**
40 mm, 80 mm, 120 mm
Further lengths may be provided upon request.
- 3 **Base plate**
to assemble a jig for retaining an item
Standard size 500 mm x 255 mm



Floor stand

It enables a printer system be ready quickly and flexibly in any manufacture plant. Target positions (i.e. heights, widths) to apply a label can be set in few steps. Four guide rollers provide mobility. At the place of operation, the floor stand can be aligned with the help of feet to adjust.

Floor stand	1600
Total height mm	1600
Height to apply a label mm max.	1400
Offset to the centre of a label mm	230 - 500
Carriage W x H x D mm	600 x 140 x 860



Jig to retain a printer unit

A printer can be fixed to the assembly plate and quick-locked.

Label printers to feature a special cover or a protective chassis

9.1



Conductive ESD surface

provided for SQUIX 2, SQUIX 4, SQUIX 6

Manufactured according to DIN EN 61340-5-1:2016 to protect from electrostatic charge

The hinged cover, top plate included, is also a spare part.

9.2



Food application design

provided for SQUIX 4, SQUIX 6

By means of a magnetic cover, splints can be detected by metal detectors or x-ray inspection systems.

Blue color optically differentiates from food.

The entire casing can be manufactured detectable upon request.

Materials comply with food directives such as EU Nr. 10/2011 and FDA CFR 21 177.2600

9.3



Stainless steel chassis for food applications

provided for SQUIX 4, SQUIX 6

Labels are removed through an aperture on the front.

The front cover must be opened and the printer pulled out on telescopic rails for material replacement. Steam jet cleaning only if the entire unit is closed.

Protection class IP69K according to EN 60529

9.4



Chassis protecting from dust

provided for SQUIX 4, SQUIX 6

Labels are removed through an aperture on the front.

A filtered fan provides excess pressure and prevents from dust entering the chassis.

Protection class IP52 according to EN 60529

Chassis for cleanroom operation feature a suction nozzle provided for SQUIX 4, SQUIX 6

Maintenance



Label sensors

They can be unlocked by touch and pulled out for cleaning.



Print heads

They are easy to replace in few steps. In general, no adjustments are required.




Print rollers

They are quick and easy to loosen for cleaning or removal using a screw.

All-purpose tool

It is provided close at hand on a unit for replacing components and assembling periphery.

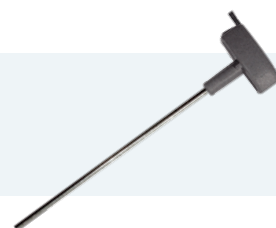

Service

Trained cab technicians support worldwide in maintenance and repair.

Send your unit to a cab service point or a selected service partner. Check and repair require just few workdays. Loan units are provided to bridge gaps.

You prefer performance in your company?
Then contact our Service Department:
phone **+49 721 6626 300**, email service.de@cab.de

Trainings

Refresh your know-how of cab devices with regard to efficient operation, service and repair.

In Karlsruhe, training sessions deal with how to operate a unit, design a label, make use of software or printer drivers, program, access a database and integrate in a network or a superior ERP system. Just ask for our current timetable.



We offer trainings adapted to individual demands, either in Karlsruhe or on site in your company.




Delivery program






Label printers

Pos.		Item no.	Materials aligned to the left
1.1		5977030 5977031	SQUIX 2/300 label printer SQUIX 2/600 label printer
1.2		5977032 5977033	SQUIX 2/300P label printer SQUIX 2/600P label printer
1.3		5977014 5977015 5977001 5977002 xxxxxxx.648 xxxxxxx.649	SQUIX 4.3/200 label printer SQUIX 4.3/300 label printer SQUIX 4/300 label printer SQUIX 4/600 label printer incl. CSQ401 cutter incl. CSQ402 cutter
1.4		5977016 5977017 5977004 5977005	SQUIX 4.3/200P label printer SQUIX 4.3/300P label printer SQUIX 4/300P label printer SQUIX 4/600P label printer
1.5		5977034 5977035	SQUIX 6.3/200 label printer SQUIX 6.3/300 label printer
1.6		5977036 5977037	SQUIX 6.3/200P label printer SQUIX 6.3/300P label printer
1.7		5977067	SQUIX 8.3/300 label printer
1.8		5977068	SQUIX 8.3/300P label printer
1.9		5977052 5977053 xxxxxxx.648 xxxxxxx.649	SQUIX 4.3/200TD label printer SQUIX 4.3/300TD label printer incl. CSQ401 cutter incl. CSQ402 cutter
1.10		5977054 5977055	SQUIX 4.3/200PTD label printer SQUIX 4.3/300PTD label printer
Pos.		Item no.	Materials in centered position
1.11		5977018 5977019 5977010 5977011 xxxxxxx.648 xxxxxxx.649 xxxxxxx.659	SQUIX 4.3/200M label printer SQUIX 4.3/300M label printer SQUIX 4/300M label printer SQUIX 4/600M label printer incl. CSQ401 cutter incl. CSQ402 cutter incl. PSQ403 perforation cutter
1.12		5977022 5977023 5977007 5977008	SQUIX 4.3/200MP label printer SQUIX 4.3/300MP label printer SQUIX 4/300MP label printer SQUIX 4/600MP label printer
Pos.		Item no.	UHF RFID module provided
1.13		xxxxxxx.406 xxxxxxx.407 xxxxxxx.408 xxxxxxx.409	Standard UHF RFID module On metal UHF RFID module High sensitivity UHF RFID module Dual UHF RFID module (standard and on metal)
Pos.		Item no.	Separator provided (textiles)
1.14		5977024 5977012 5977025	SQUIX 4.3/300MT label printer SQUIX 4/300MT label printer SQUIX 4/600MT label printer

Pos.		Item no.	Options provided
1.15		xxxxxxx.124 xxxxxxx.124 xxxxxxx.124	ESD surface Label printer SQUIX 2/xxx-ESD Label printer SQUIX 4/xxx-ESD Label printer SQUIX 6/xxx-ESD
1.16		xxxxxxx.122 xxxxxxx.122	Food applications Label printer SQUIX 4/xxx-FOOD Label printer SQUIX 6/xxx-FOOD

	Scope of delivery
	Label printer Type E+F power cable, 1.8 m Connecting USB cable, 1.8 m Instructions DE / EN
	Available online
	Instructions in 30 languages Configuration manuals DE / EN / FR Service manuals DE / EN Spare parts lists DE / EN Programming manual EN Windows printer drivers for Windows 10 Server 2016 Windows 11 Server 2019 Server 2022 Certification WHQL in preparation Apple Mac OS X printer drivers DE / EN / FR Linux printer drivers DE / EN / FR cablabel S3 Lite software cablabel S3 Viewer Database Connector
	https://setup.cab.de/en


Wear parts

Pos.		Item no.	Designation
2.1		5977384.001 5977385.001 5977382.001 5977383.001 5977444.001 5977380.001 5977386.001 5977387.001 5987351.001	Print head 2/300 Print head 2/600 Print head 4.3/200 Print head 4.3/300 Print head 4/300 Print head 4/600 Print head 6.3/200 Print head 6.3/300 Print head 8.3/300
2.2		5954102.001 5954180.001 5954245.001 5954103.001	DR2 print roller DR4 print roller DR6 print roller DR8 print roller
2.3		5954985.001	DRS4 print roller
2.4		5954104.001 5954183.001 5954246.001 5981495.001	RR2 deflection roller RR4 deflection roller RR6 deflection roller RR8 deflection roller
Pos.		Item no.	On metal operation, RFID antenna assembled
2.5		5987177.001 5987178.001 5987179.001 5987180.001	Print head 4.3/200 Print head 4.3/300 Print head 4/300 Print head 4/600

Delivery program

Accessories













Pos.		Item no.	Designation
2.6		5953700.001	DR4-M30 print roller
		5953701.001	DR4-M60 print roller
		5953702.001	DR4-M80 print roller
2.7		5954978.001	DRS2 print roller
		5954985.001	DRS4 print roller
		5954979.001	DRS6 print roller
2.8		6010186	External control panel
		5907718.850	USB cable, 1.8 m
		5907730.850	USB cable, 3 m
		5907750.850	USB cable, 5 m
		5907760.850	USB cable, 11 m
		5907765.850	USB cable, 16 m
2.9		5977530.001	Label sensor 4,5
2.10		6010840	Print head pressing system 2L
		6010841	Print head pressing system 4L
		6010842	Print head pressing system 6L
2.11		5977797	Antistatic brush 2"
		5977339	Antistatic brush 4" / 6"
2.12		5959622	Adapter 100
2.13		5977370	SD memory card
2.14		5977730	USB stick
2.15		5978912.001	USB WLAN stick 2.4 GHz 802.11b/g/n
2.16		5977731	USB WLAN stick with a rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.17		5977732	USB Bluetooth adapter
Pos.		Item no.	Peeling off
2.18		5977585	PS800 present sensor
2.19		5984482	PS 2/900 present sensor
		5977538	PS 4/900 present sensor
2.20		5977735	PS1000 MP present sensor
2.21		5977798	Extended DP210 peel-off plate
		5978908	Extended DP410 peel-off plate
		5977799	Extended DP610 peel-off plate
2.22		5978909	Reflective product sensor
Pos.		Item no.	Interfaces
3.1		5977767	Digital I/O interface
3.2		5917651	I/O interface plug, SUB-D, 25 pins
3.3		5948205	Label selection - I/O box

Pos.		Item no.	Switches
3.4		5955710	TR2 hand switch
3.5		5955711	Foot switch
Pos.		Item no.	Connecting cable
4.1		5550818	RS232-C cable 9/9 pins, 3 m
Pos.		Item no.	Cutting, perforating
5.1		5984550	CSQ 401 cutter incl. a tray
		5984565	CSQ 402 cutter incl. a tray
5.2		5984130	PSQ 403 perforation cutter
5.3		5979032	CU200 cutter
		5978900	CU400 cutter incl. a tray
		5979033	CU600 cutter
		5984100	CU800 cutter
5.4		5978901	PCU400/2,5 perforation cutter
		5978920	PCU400/10 perforation cutter
Pos.		Item no.	Stacking, verifying
5.5		5978902	ST400 M stacker providing a cutter and a base frame
		xxxxxxx	Support table, label W x H
5.6		5977840	CC200-SQ scanner
Pos.		Item no.	Rewinding, unwinding
6.1		5979031	RG200 guide plate
		5978903	RG400 guide plate
6.2		5948102.597	External ER1/210 rewinder
		5943251.597	External ER2/210 rewinder
		5945802.597	External ER3/210 rewinder
6.3		5946090	External ER4/300 rewinder
		5946420	External ER6/300 rewinder
6.4		5946091	External EU4/300 unwinder
		5946421	External EU6/300 unwinder
6.5		5978943	Kit to adapt ER4, ER6 and EU4, EU6

x - part no. specific to order






Delivery program

Applicators, demand modules



Pos.		Item no.	Designation
7.1		5987150.xxx	AXON 2 tube applicator providing a type 56.1 peel-off plate (Ø 14 mm), a TRV 14 transport roller, a tray
7.2		5988000	WICON wrap-around applicator Included in the accessory pack are - DR4-M30, DR4-M60 print rollers - WICON peel-off plate
7.3		5976086 5976087 5976088	S1000-220 applicator S1000-300 applicator S1000-400 applicator
7.4		5949072	Universal A1021 pad max. 70 mm x 60 mm
		5949075	Universal A1021 pad max. 90 mm x 90 mm
		xxxxxxx	A1021 tamp-on pad according to label W x H
7.5		5949076	Universal A1321 pad max. 116 mm x 102 mm
		5949077	Universal A1321 pad max. 116 mm x 152 mm
		xxxxxxx	A1321 tamp-on pad according to label W x H
7.6		xxxxxxx	A2021 blow-on pad according to label W x H
7.7		xxxxxxx	A1411 roll-on pad according to label W x H
7.8		5976085	S3200 applicator
7.9		xxxxxxx	A3200-1100 tamp-on pad according to label W x H
7.10		xxxxxxx	A3200-2100 blow-on pad according to label W x H
7.11		5976083 5976083.242 5987120 5979035 5979035.242	S5104 demand module incl. label sensor S5104 demand module, no label sensor S5104 M demand module S5106 demand module incl. label sensor S5106 demand module, no label sensor
7.12		5976084 5979089 5550999 8930933.001	All-around labeler Mount Cable for plugging a SQUIX printer Foot switch

x - part no. specific to order



Assembly assistants

Pos.		Item no.	Designation
8.1		5979036 5978910 5978923	Assembly plate SQUIX 2 Assembly plate SQUIX 4 Assembly plate SQUIX 6
8.2		5958365 5965929 5971136	Profile 40 mm Profile 80 mm Profile 120 mm further lengths may be provided upon request
8.3		5961203	Base plate 500 mm x 255 mm
8.4		5947400	Floor stand 1600 mm
8.5		5979037 5978922 5979038	Jig for retaining a SQUIX 2 printer unit Jig for retaining a SQUIX 4 printer unit Jig for retaining a SQUIX 6 printer unit


Special covers

Pos.		Item no.	Designation
9.1		5977771.001 5977763.001 5977772.001	Hinged cover SQUIX 2-ESD Hinged cover SQUIX 4-ESD Hinged cover SQUIX 6-ESD
9.2		5977764.001 5977774.001	Hinged cover SQUIX 4-FOOD Hinged cover SQUIX 6-FOOD

Protective chassis

Pos.		Item no.	Designation
9.3		5979071 5979305	Stainless steel chassis SQUIX 4 Stainless steel chassis SQUIX 6
9.4		5979080 5979300 5979080.126 5979300.126	Chassis SQUIX 4 220 V protecting from dust Chassis SQUIX 6 220 V protecting from dust Chassis SQUIX 4 for cleanroom operation Chassis SQUIX 6 for cleanroom operation

Label software

Pos.		Item no.	Designation
11.7		Bundle	ccablabel S3 Lite (download on cab.de/en)
		5588001	cablabel S3 Pro 1 WS
		5588100	cablabel S3 Pro 5 WS
		5588101	cablabel S3 Pro 10 WS
		5588150	cablabel S3 Pro 1 additional licence
		5588151	cablabel S3 Pro 4 additional licences
		5588152	cablabel S3 Pro 9 additional licences
		5588002	cablabel S3 Print 1 WS
		5588105	cablabel S3 Print 5 WS
		5588106	cablabel S3 Print 10 WS
		5588155	cablabel S3 Print 1 additional licence
		5588156	cablabel S3 Print 4 additional licences
		5588157	cablabel S3 Print 9 additional licences
11.10		in preparation	cablabel S3 Print Server
		9009950	Programming manual EN, printed copy

Overview of cab products

Label printers
MACH1, MACH2



Label printers
EOS 2



Label printers
EOS 5



Label printers
MACH 4S



Label printers
SQUIX 2



Label printers
SQUIX 4



Label printers
SQUIX 6.3



Label printers
SQUIX 8.3



Label printers
XD Q double-sided



Label printers
XC Q two-colored



Print and apply systems
HERMES Q



Print and apply systems
Hermes C two-colored



Tube labeling systems
AXON 1



Print modules
PX Q



Labels and ribbons



Label software
cablabel S3



Label dispensers
HS, VS



Labeling heads
IXOR



Marking lasers
XENO 4



Laser marking systems



Germany
cab Produkttechnik GmbH & Co KG
Karlsruhe
Phone +49 721 6626 0
www.cab.de

France
cab Technologies S.à.r.l.
Niedermörsen
Phone +33 388 722501
www.cab.de/fr

USA
cab Technology, Inc.
Chelmsford, MA
Phone +1 978 250 8321
www.cab.de/us

Mexico
cab Technology, Inc.
Juárez
Phone +52 656 682 4301
www.cab.de/es

Taiwan
cab Technology Co., Ltd.
Taipei
Phone +886 (02) 8227 3966
www.cab.de/tw

China
cab (Shanghai) Trading Co., Ltd.
Shanghai
Phone +86 (021) 6236 3161
www.cab.de/cn

Singapore
cab Singapore Pte. Ltd.
Singapore
Phone +65 6931 9099
www.cab.de/en

South Africa
cab Technology (Pty) Ltd.
Randburg
Phone +27 11 886 3580
www.cab.de/za

cab // 820 distribution and service partners in more than **80** countries